

H/L V Series



Shown with Extended Junction Box

Standard Features

High/Low Voltage strips can be used for rigged sets with multiconductor cable or CMS Pantograph systems.

Black extruded aluminum wireway with interlocking cover sections to exceed UL 1573 standards.

15, 20, 30, 50, 60, and 100 Amp connectors and receptacles available.

DMX input/output.

Voltage barrier partition.

Flush receptacles or 18" pigtail mounted connectors.


Pre-wired with 125° C XLP high temperature wire to molded barrier terminal blocks.

Terminal blocks can accept up to #8 gauge wire.

2" white die-cut circuit identification.

Supplied with standard mounting brackets.

UL listed and labeled.

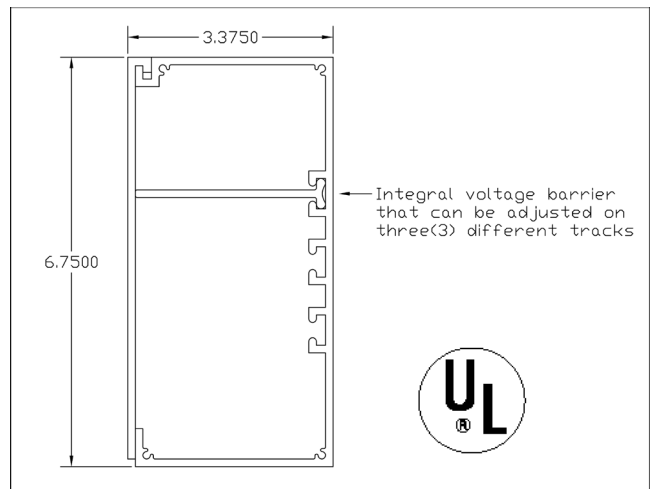

Optional Features

Custom colors.

LED indicator lights.

Custom circuit identification.

Custom mounting brackets.

Feed through wiring.

Multipin connector input/output.

Consult factory for other available Low Voltage outlets.

Available in 16 gauge steel.