


# RM Series



### Standard Features

- 16 gauge galvanized steel back box.
- 16 gauge steel oversized face plate.
- 15, 20, 30, 50, 60, and 100 Amp connectors and receptacles available.
- Flush receptacles or pigtail mounted connectors.
- Black matte finish.
- 3/4" white die-cut circuit identification.
- UL listed and labeled.

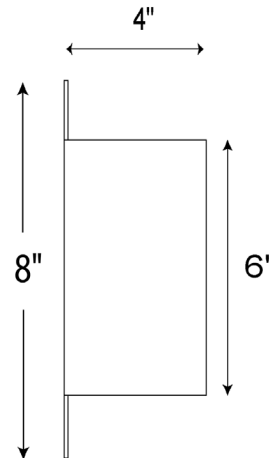

### Optional Features


- Custom colors.
- LED indicator lights.
- Custom circuit identification.
- DMX input/output.

	Box Sizes	
	Faceplate	Back Box
1 Gang	8"	6"
2 Gang	8"	6"
3 Gang	10"	8"
4 Gang	12"	10"
5 Gang	14"	12"
6 Gang	14"	12"

- A. This assembly shall consist of a 16 gauge, galvanized steel housing designed for recessed mounting in the wall. The unit shall be provided with a 16 gauge steel oversized face plate.
- B. The box may have up to six 15, 20, 30, 50, 60, and 100 Amp receptacles/connectors, flush mounted or pigtail, as required.
- C. The box shall be completely pre-wired at the factory, with ground lugs installed.
- D. Finish shall be black matte enamel.
- E. The entire assembly shall be listed and labeled by Underwriters Laboratories.

## Ordering Information

OUTLET TYPE	DESCRIPTION
2PGFL	20 Amp. Stage pin receptacle
2PGPT	20 Amp. Stage pin 18" pigtail
L520R	20 Amp. Twist lock receptacle
L520PT	20 Amp. Twist lock 18" pigtail
520R	20 Amp. Parallel blade receptacle
520PT	20 Amp. Parallel blade 18" pigtail
602PGFL	60 Amp. Stage pin receptacle
602PGPT	60 Amp. Stage pin 18" pigtail

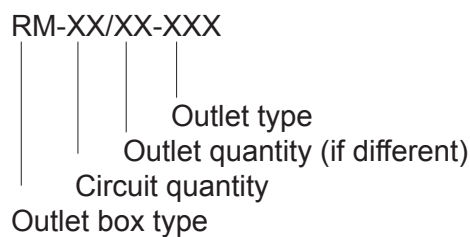

Sample: RM-4-2PGFL  
 Recessed Mounted Outlet Box with 4 - 20 amp circuits and 4 stage pin receptacles.

**Please specify circuit numbering when ordering.** Consult the factory for custom types and sizes.